



DA-CORNTHISTLE

Park and Street Luminaires



Images for the product family and options:

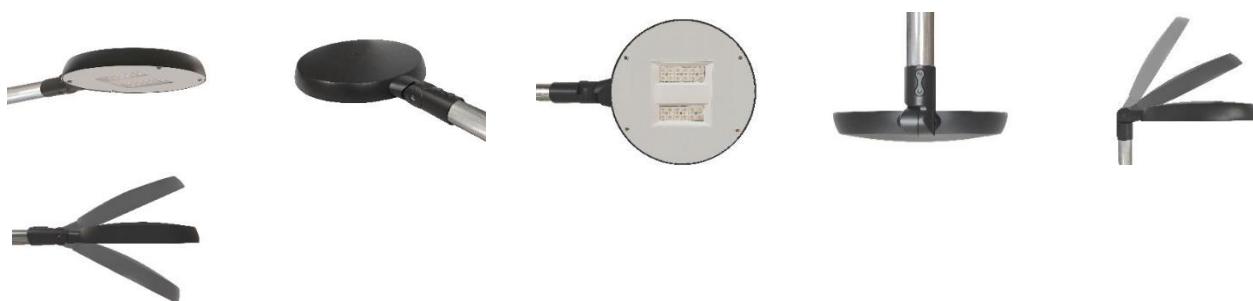

Description:

Pole-mounted LED street luminaire
 Light distribution: direct
 Optical system: lenses, tempered glass diffuser, impact resistant
 Housing: aluminium
 Colour: black grey, RAL 7021

General data:

Mains voltage: 220-240V, 0/50-60Hz
 LED lifetime, h: 100000/L90B10
 SDCM: 5
 Protection class IEC: I
 Ingress protection code: IP66
 Mechanical impact resistance: IK08
 Operating temperature range, °C: ta -40...+40

Installation:

With two screws on Ø60mm horizontal or vertical pole, on the wall (mounting bracket to be ordered separately). Adjustable installation angles: on horizontal pole: +/- 90 degrees, on vertical pole: + 90 degrees. Cable, 3.0m, 3x0.75mm²

Environment:

Outdoor

Application:

Parking area, public space, street

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI * (Ra)	CCT*, K	Weight, kg
DA-CORNTHISTLE-672-36W-40-IP66	672	490	91	5820	36,2	161	70+	4000	9
DA-CORNTHISTLE-672-51W-40-IP66	672	490	91	7923	51	155	70+	4000	9
DA-CORNTHISTLE-672-67W-40-IP66	672	490	91	9891	67,2	147	70+	4000	9
DA-CORNTHISTLE-672-78W-40-IP66	672	490	91	11255	78,4	144	70+	4000	9

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. IcLighting is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

*Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Available options:

T730	Colour temperature 3000K, CRI 70+
T740	Colour temperature 4000K, CRI 70+
LS140	Optics with 140x140 beam angle
LSM1	Optics with asymmetric beam SM1
LSM2	Optics with asymmetric beam SM2
LSS1	Optics with asymmetric beam SS1
LSS2	Optics with asymmetric beam SS2
LSPR	Optics with asymmetric beam LSPR for pedestrian-crossing "right"
LSPL	Optics with asymmetric beam LSPL for pedestrian-crossing "left"

DALI Driver with DALI interface and switch-control dimming

ADIM Driver with autonomous two-level dimming

II Electric Shock protection class II

CBF3x1.5-N m Outgoing flexible cable 3x1.5mm². Cable length: according to the customer's specification

CBF5x1.5-N m Outgoing flexible cable 5x1.5mm². Cable length: according to the customer's specification

*note - please specify the length of outgoing cable before placing an order

RAL RAL colour



*note - price for uncommon RAL colour or quantity less than MOQ could be different from indicated. Ask before placing an order

LS140

LSM1


LSM2

LSS1

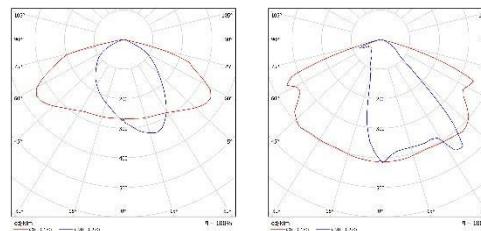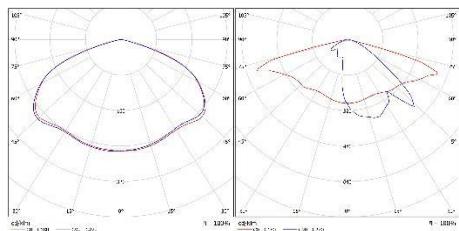

Date of issue: 2024-05-31 ■ IcLighting LTD

■ info@iclighting.co.uk ■ www.iclighting.co.uk

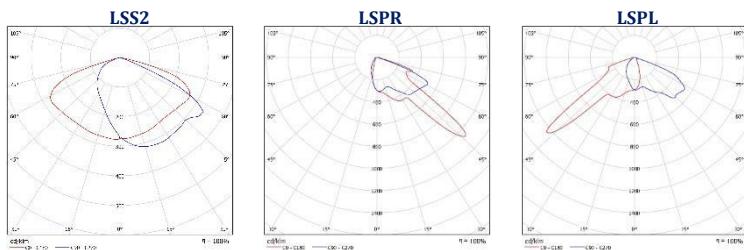

Available accessories:



Product: WALL MTG bracket (Street LED D60mm 10 P7035S)

Description: Bracket for street luminaire installation onto wall, pole diameter D60mm, 10 angle, 1pcs